




IT

Apparecchio per illuminazione indoor. Si installa con binario elettrificato monofase con tempi di montaggio veramente veloci, e soprattutto si riconfigura in posizione e orientamento del fascio luminoso. E' adatto ad attività di vendita come centri commerciali e negozi. Si caratterizza per design innovativo, alta efficienza luminosa, alta resa cromatica e robustezza di funzionamento. La struttura è realizzata interamente in alluminio. L'apparecchio è disponibile a luce ambrata 4000K.

GB

Luminaire lighting indoors. It installs with single-phase circuit track mounting times really fast, and above all reconfigures itself in the position and orientation of the light beam. And 'suitable for sales activities such as shopping malls and shops. It is characterized by an innovative design, high luminous efficiency, high color rendering and robustness of operation. The structure is made entirely of aluminum. The device is available in amber light 4000K.

Dimensioni 100x150 mm



V	COSφ	W	V2	Light Bulb	K	LED	Beam Angle	Kg	COLOUR
180/264	0,98	30	30-32	LED	4000	1	46°	1,6	Grigio Gray

Corpo Alluminio

Led di 30 W ad alta luminosità.

Diffusore Riflettore

Alimentatore incluso nel vano lampada.

Viteria esterna in acciaio inox.

Installabile in binario

Tensione di funzionamento: 180/264V AC 50/60Hz.

Temperatura di funzionamento: -25°C ~ 50°C.

Umidità ambientale: 10% ~ 90%.

CARATTERISTICHE PRINCIPALI:

- Protezione contro scariche elettriche fino a 2,5KV.
- Protezione contro i sovracarichi.

Casing: aluminum

Led 30 high brightness

Diffuser: Reflector

Wiring: internal power supplied unit.

External screws: in stainless steel.

Installation Ceiling with Track

Input voltage: 180/264V AC 50/60Hz


Temperature of working condition: -25°C ~ 50°C.

Humidity of working condition: 10% ~ 90%.

MAIN FEATURES:

- Protection against electric shock up to 2,5kV.
- Protection against overloads.



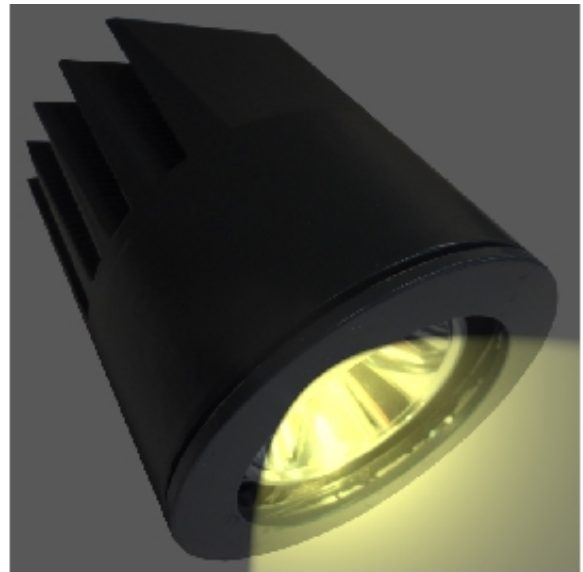

Luce Emergenza



Part Number	Luce	Consumo Nominale	Lampada riferimento	Risparmio	Interdistanza	Altezza
SYS070A200	4000K	30 W	70W HQI	50 W	0,8 mt	3 mt
Part Number	Descrizione accessorio					
SYS015A200	Kit Luce emergenza 4 Ah					

INTERNI

Diagramma 1

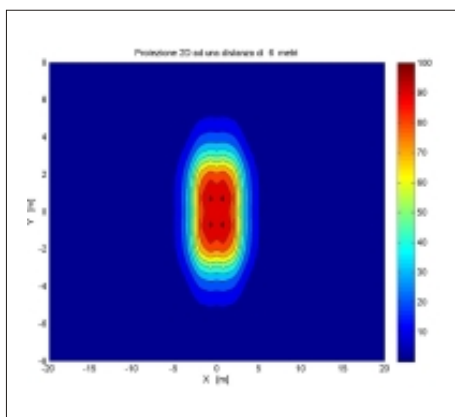


Diagramma 2

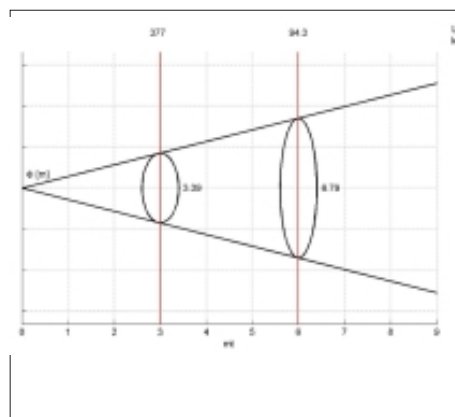


Diagramma 3

